

EXIR HD-TVI CAMERA

FULL HD 1080p Outdoor Vari-focal EXIR Bullet Camera


VHC-6230



Key Features

- 2 Megapixel high-performance CMOS
- Analog HD output, up to 1080P resolution
- 2.8-12mm vari-focal lens
- True WDR, up to 120dB
- EXIR technology, up to 50m IR distance
- True Day/Night
- OSD menu, 3D DNR, Smart IR
- UTC (Up the Coax) function
- IP66 weatherproof

Dimensions

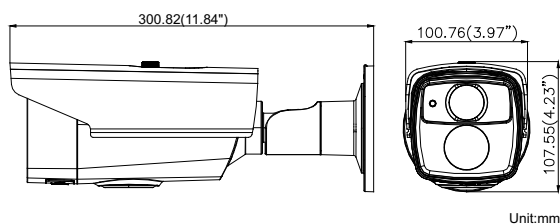

Technical Specifications

Model No	VHC-6230
Image Sensor	1 / 3" Progressive Scan CMOS
Signal System	PAL / NTSC
Effective Pixels	1920(H)*1080(V)
Min. Illumination	0.01 Lux @ (F1.2,AGC ON),0 Lux with IR 0.014 Lux @ (F1.4,AGC ON),0 Lux with IR
Shutter speed	1/25 s to 1/50,000 s
Lens	2.8-12mm @ F1.4 Angle of view: 92° - 32°
Lens Mount	φ14
Day & Night	ICR
Wide Dynamic Range	120 dB
Synchronization	Internal synchronization
Video Frame Rate	1080p@25fps/1080p@30fps
HD Video Output	1 Analog HD output
CVBS Output	1Vp-p Composite Output(75Ω / BNC)
S / N Ratio	More than 52dB
Scene	Indoor, Outdoor, Indoori, LOW-LIGHT
Camera ID	On/off (15 characters, position programmable)
AGC	Support
D/N Mode	Color/BW/EXT
White Balance	ATW, AWC-SET, Indoor, Outdoor, Manual
Privacy Mask	On/Off, maximum 8 zones
Motion Detection	On/Off, maximum 4 zones
BLC	Support
Anti-flicker	On/Off
Language	English, Japanese, Korean, German, French, Italian Spanish, Polish, Russian, Portuguese, Chinese
Function	Eclipse, Digital noise reduction, Digital zoom(62x) Slow shutter, Mirror, Defog, Defect pixel, correction SMART D-ZOOM
Working Temperature	-30°C ~ +60°C
Humidity	90% or less (non-condensing)
Power Supply	12 VDC ; -A: 12 VDC, 24 VAC
Power Consumption	12V DC: Max. 7W ; 24V AC: Max. 10W
Weather Proof Ratings	IP 66
IR Range	Up to 50m
Communication	Up the coax(need UTC controller) Protocol: Pelco-C(Coaxitron)
Dimensions	300.82×100.76×107.55mm(11.84"×3.97"×4.23")
Weight	700 g (1.54 lbs)