

PROFESSIONAL IP CAMERA

3MP IR Bullet Network Camera


VNC-4320



Key Features

- 1/3" progressive scan CMOS
- 2048 x 1536 @ 25fps frame rate
- 4.0mm fixed lens
- H.264 / MJPEG Compression
- Up to 25m IR distance
- Support Line crossing and intrusion detection
- DWDR, 3D DNR, ROI, BLC, Defog
- PoE, ONVIF
- 5 Sereis : Audio I/O , Alarm I/O (Optional)
- IP66 weatherproof

Dimensions

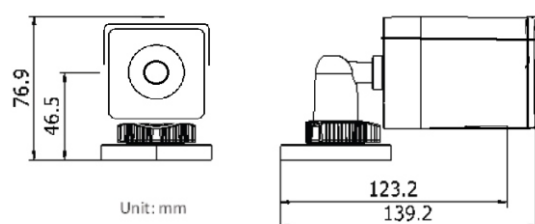

Technical Specifications

Model NO.	VNC-4320
Image Sensor	1/3" progressive scan CMOS
Min. Illumination	0.07 lux (@F1.2, AGC ON / 0 lux with IR
Shutter Time	1/25s (1/30s) ~ 1/100,000s
Lens	4mm (@F2.0, angle of view: 75.8° (6mm, 12mm optional)
Lens Mount	M12
Day & Night	IR cut filter with auto switch
Digital Noise Reduction	3D DNR
Wide Dynamic Range	Digital WDR
Video Compression	H.264 / MJPEG
H.264 codec profile	Main profile
Video bit rate	32 Kbps ~ 16 Mbps
Max. resolution	2048 x 1536
Frame rate	50Hz: 25fps (2048 x 1536), 25fps (1920 x 1080) 25fps (1280 x 960) 60Hz: 25fps (2048 x 1536) 30fps (1920 x 1080), 30fps (1280 x 720)
Image settings	Saturation, brightness, contrast, sharpness adjustable through client software or web browser
BLC	Yes, zone configurable
Network storage	NAS
Alarm trigger	Motion detection,dynamic analysis,tampering alarm
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP SMTP, SNMP, IGMP, 802.IX, QoS, IPv6, Bonjour
System compatibility	ONVIF, PSIA, CGI
Security	User Authentication, reset button, dual stream, watermark
Communication interface	1 RJ45 10M / 100M ethernet port
Operating conditions	-30°C ~ +60°C , humidity 95%
Power supply	12 VDC ± 10%, PoE (802.3af)
Power consumption	Max. 5W (7W with ICR on)
Ingress protection level	IP66
IR range	up to 25m
Dimensions	60.4 x 76.9 x 139.28mm
Weight	500g (1.1lbs)