

PROFESSIONAL EXIR IP CAMERA

3MP EXIR Bullet Network Camera


VNC-4322



Key Features

- 1/3" progressive scan CMOS
- 2048 x 1536 @ 25fps frame rate
- 4.0mm fixed lens
- H.264 / MJPEG Compression
- EXIR technology, up to 50m IR distance
- Support Line crossing and intrusion detection
- DWDR, 3D DNR, ROI, BLC, Defog
- PoE, ONVIF, SD Card
- 5 Sereis : Audio I/O, Alarm I/O (Optional)
- IP67 weatherproof

Dimension

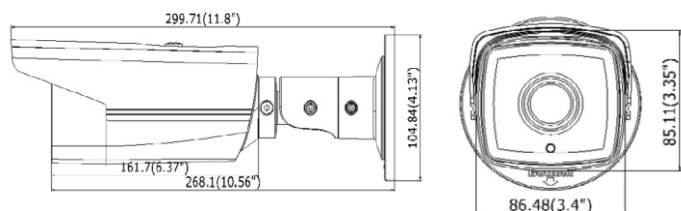

Technical Specifications

Model No	VNC-4322
Image Sensor	1/3" progressive scan CMOS
Min. Illumination	0.01 Lux @(F1.2,AGC ON), 0 Lux with IR 0.014 Lux @(F1.4,AGC ON), 0 Lux with IR
Shutter Time	1/3 s to 1/100,000 s
Lens	4 mm @ F2.0 (6mm, 16mm optional)
Day & Night	ICR
Digital Noise Reduction	3D DNR
Wide Dynamic Range	Digital WDR
Video Compression	H.264 / MJPEG
H.264 codec profile	Baseline profile / main profile
Video bit rate	32 Kbps - 12 Mbps
Dual Stream	Yes
Max. resolution	2048 x 1536
Frame rate	50Hz: 25fps (2048 x 1536), 25fps (1920 x 1080), 25fps (1280 x 960) 60Hz: 30fps (2048 x 1536), 30fps (1920 x 1080), 30fps (1280 x 960), 30fps (1280 x 720)
Image settings	Rotate mode, Saturation, Brightness, Contrast adjustable by client software or web browser
BLC	Yes, zone configurable
ROI	Support
Network storage	NAS
Alarm trigger	Motion detection, tampering alarm, scene change detection, face detection, intrusion detection, Line crossing detection
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP SMTP, SNMP, IGMP, 802.IX, QoS, IPv6, Bonjour
System compatibility	ONVIF, PSIA, CGI
Communication interface	1 RJ45 10M / 100M ethernet port
Operating conditions	-30°C ~ +60°C , humidity 95%
Power supply	12 VDC ± 10% , PoE (802.3af)
Power consumption	Max. 7W
Ingress protection level	IP67
IR range	EXIR LEDs, up to 50m
Dimensions	Φ105mm x ~300mm
Weight	1200g