

PROFESSIONAL IP CAMERA

3MP Mini Dome Network Camera


VNC-4360



Key Features

- 1/3" progressive scan CMOS
- 2048 x 1536 @ 25fps frame rate
- 4.0mm fixed lens
- H.264 / MJPEG Compression
- Up to 10m IR distance
- Support Line crossing and intrusion detection
- DWDR, 3D DNR, ROI, BLC, Defog
- PoE, ONVIF, SD Card
- S Series : Audio I/O, Alarm I/O (Optional)
- IP66 weatherproof

Dimensions

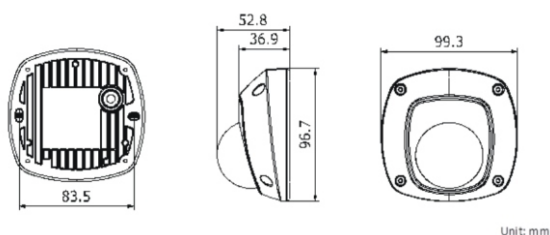

Technical Specifications

Model NO.	VNC-4360
Image Sensor	1/3" progressive scan CMOS
Min. Illumination	0.19lux @ F2.0, AGC on 0 lux with IR
Shutter Time	1/30s ~ 1/100,000s
Lens	4mm@F2.0, angle of view: 75.8° (2.8mm, 6mm optional)
Lens Mount	M12
Day & Night	ICR
Digital Noise Reduction	3D DNR
Wide Dynamic Range	Digital WDR
Video Compression	H.264 / MJPEG
H.264 codec profile	Main profile
Video bit rate	32 Kbps ~ 16 Mbps
Max. resolution	2048 x 1536
Frame rate	50Hz: 25fps (2048 x 1536), 25fps (1920 x 1080), 25fps (1280 x 960) 60Hz: 30fps (2048 x 1536), 30fps (1920 x 1080), 30fps (1280 x 960), 30fps (1280 x 720)
Image settings	Saturation, brightness, contrast adjustable through client software or web browser
BLC	Yes, zone configurable
Network storage	NAS
Alarm trigger	Motion detection, tampering alarm, network disconnect, IP address conflict, storage exception
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, QoS
System compatibility	ONVIF, PSIA, CGI
General functionalities	Flickerless, dual stream, heartbeat, mirror, user authentication, video mask, watermark
Communication interface	1 RJ45 10M / 100M ethernet port
On-board storage	Built-in Micro SD/SDHC/SDXC card slot, up to 64 GB
Operating conditions	-30°C ~ +60°C Humidity 95% or less (non-condensing)
Power supply	DC12V ± 10%, PoE (802.3af)
Power consumption	Max. 7W
Impact protection	IEC60068-2-75Eh, 20J; EN50102, up to IK10
Ingress protection level	IP66
IR range	Up to 10m
Dimensions	99.9 x 97.5 x 46.5 mm (3.93" x 3.84" x 1.83")
Weight	600g (1.32 lbs)