

PROFESSIONAL IP CAMERA

3MP IR Fixed Dome Network Camera


VNC-4361



Key Features

- 1/3" progressive scan CMOS
- 2048 x 1536 @ 25fps frame rate
- 2.8mm 4mm 6mm fixed lens
- H.264 / MJPEG Compression
- Up to 25m IR distance
- Support Line crossing and intrusion detection
- DWDR, 3D DNR, ROI, BLC, Defog
- PoE, ONVIF, SD Card
- S Series : Audio I/O, Alarm I/O (Optional)
- IP66 weatherproof

Dimensions

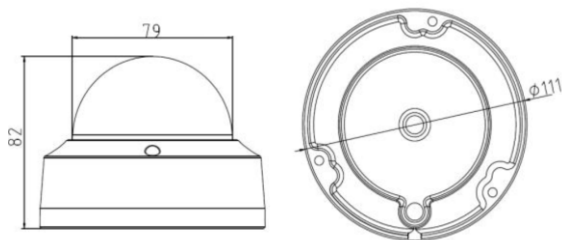

Technical Specifications

Model NO.	VNC-4361
Image Sensor	1/3" progressive scan CMOS
Min. Illumination	0.01 lux@F1.2, AGC ON, 0 lux with IR
Shutter Time	1/3s ~ 1/100,100s
Lens	4mm @ F2.0 (2.8mm, 6mm optional) 2048 x 1536 Angle of view: 86°(2.8mm), 70°(4mm), 43.3°(6mm)
Lens Mount	M12
Angle adjustment	Pan: 0° ~ 355°, Tilt: 0° ~ 65°, Rotation: 0 ~ 360°
Day & Night	IR cut filter with auto switch
Digital Noise Reduction	3D DNR
Wide Dynamic Range	Digital WDR
Video Compression	H.264 / MJPEG
H.264 codec profile	Main profile
Video bit rate	32 Kbps ~ 16 Mbps
Dual stream	Yes
Max. resolution	2048 x 1536
Frame rate	50Hz: 25fps (2048 x 1536), 25fps (1920 x 1080), 25fps (1280 x 960) 60Hz: 25fps (2048 x 1536), 30fps (1920 x 1080), 30fps (1280 x 720)
Image settings	Saturation, brightness, contrast adjustable through client software or web browser
BLC	Yes, zone configurable
ROI	Yes, up to 3 configurable areas
Network storage	Local storage: Built-in Micro SD/SDHC/SDXC card slot, up to 64 GB ; NAS
Alarm trigger	Line crossing detection, intrusion detection scene change detection, motion detection Dynamic Analysis, Tampering alarm, Network disconnect, IP address conflict, Storage full
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
System compatibility	ONVIF, PSIA, CGI, ISAPI
General functionalities	User Authentication, Watermark
Communication interface	1 RJ45 10M / 100M ethernet port
Operating conditions	-30°C ~ +60°C , humidity 95%
Power supply	DC12V ± 10%, PoE (802.3af)
Power consumption	Max. 7W
Ingress protection level	IP66
IR range	Up to 25m
Dimensions	Φ111 x 82 (4.4" x 3.2")
Weight	500g (1.1 lbs)