

PROFESSIONAL IP CAMERA

4MP EXIR Bullet Network Camera


VNC-4423



Key Features

- 1/3" progressive scan CMOS
- 2688 x 1520 @ 20fps frame rate
- 4mm, 6mm, 12mm fixed lens
- True WDR, up to 120dB
- H.264+ / H.264 / MJPEG Compression
- EXIR technology, up to 50m IR distance
- Support Line crossing and intrusion detection
- 3D DNR, ROI, Defog
- PoE, ONVIF, SD Card
- S Series : Audio I/O, Alarm I/O (Optional)
- IP67 weatherproof

Dimensions

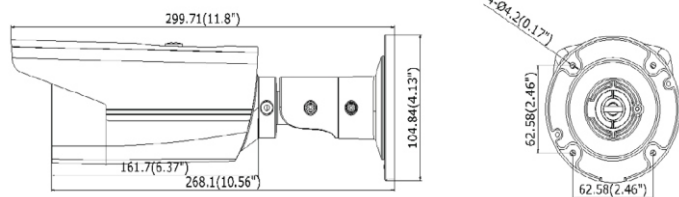

Technical Specifications

Model No	VNC-4423
Image Sensor	1/3" progressive scan CMOS
Min. Illumination	0.01Lux @(F1.2,AGC ON), 0.028Lux @(F2.0,AGC ON), 0 Lux with IR
Shutter Speed	1/3 s ~ 1/10,000 s
Slow Shutter	Support
Lens	4mm, 6mm, 12mm @ F2.0 optional
Angle of view	83°(4mm), 55.4°(6mm), 24.7°(12mm), 19.1°(16mm)
Lens Mount	M 12
Day & Night	IR cut filter with auto switch
Wide Dynamic Range	120dB
Video Compression	H.264+/H.264/MJPEG
H.264 Type	Main Profile
Video bit rate	32 Kbps ~ 16 Mbps
Max. resolution	2688 x 1520
Frame rate	50Hz: Main stream: 20fps(2688×1520), 25fps (1920×1080), 25fps(1280×720), Sub stream: 25fps (352×288), 25fps(640×360) / 60Hz: Main stream : 20fps(2688×1520), 30fps(1920×1080), 30fps (1280×720), Sub stream: 30fps(352×240)
Image Enhancement	BLC / 3D DNR / ROI
Image Setting	Rotate Mode, Saturation, Brightness, Contrast Sharpness adjustable by client software
Day & Night Switch	Auto/Schedule/Triggered by Alarm In
Network storage	NAS (Support NFS,SMB/CIFS)
Detection	Intrusion detection, Line crossing detection, Motion detection Dynamic analysis
Alarm trigger	Tampering alarm, Network disconnect, IP address conflict, Storage exception
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
Security	Anti-Flicker, heartbeat, mirror, password protection privacy mask, watermark, IP address filtering Anonymous access
Standard	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI
Interface	1 RJ45 10M/100M Ethernet interface
Operating conditions	-30°C ~ +60°C, Humidity 95%
Power supply	12V DC±10%, PoE (802.3af)
Power consumption	Max. 7.5W
Ingress protection	IP 67
IR range	Up to 50m
Dimensions	299.71 × 86.48 × 85.11(11.8" × 3.4" × 3.35")
Weight	1200g (2.65lbs)