

IP CAMERA

5MP EXIR Bullet Network Camera


VNC-4522



Key Features

- 1/3" progressive scan CMOS
- 2560 x 1920 @ 20fps frame rate
- 4mm, 6mm, 12mm fixed lens
- H.264+ / H.264 / MJPEG Compression
- EXIR technology, up to 50m IR distance
- Support Line crossing and intrusion detection
- 3D DNR, ROI, Electronic shutter, Defog
- PoE, ONVIF, SD Card
- 5 Sereis : Audio I/O, Alarm I/O (Optional)
- IP67 weatherproof

Dimension

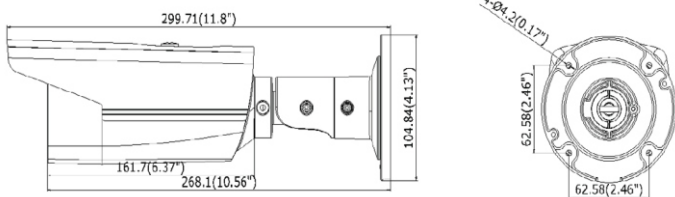

Technical Specifications

Model No	VNC-4522
Image Sensor	1/3" Progressive Scan CMOS
Min. Illumination	0.01Lux @ (F1.2, AGC ON), 0 Lux with IR 0.014Lux @ (F1.4, AGC ON), 0 Lux with IR
Shutter Time	1/3s to 1/10,000 s
Lens	4mm, 6mm, 12mm @ F1.4 optional
Lens Mount	M 12
Day & Night	IR Cut Filter with auto switch
Digital Noise Reduction	3D DNR
Wide Dynamic Range	DWDR
Video Compression	H.264+/H.264/MJPEG
H.264 Type	Main Profile
Video Bit Rate	256 Kbps ~ 16 Mbps
Max. resolution	2560 x 1920
Frame rate	50Hz: 20fps (2560x1920), 25fps(2048x1536) 25fps(1920x1080), 25fps(1280x720) 60Hz: 20fps (2560x1920), 30fps(2048x1536), 30fps (1920x1080) 30fps(1280x720)
Image Settings	Rotate mode, Saturation, Brightness, Contrast adjustable by client software or web browser
Backlight compensation	Yes, zone optional
ROI	Support
Network storage	NAS (Support NFS,SMB/CIFS)
Alarm trigger	Intrusion Detection, Line Crossing, Motion detection Dynamic analysis, Tampering alarm Network disconnect , IP address conflict, Storage exception
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.IX, QoS, IPv6, Bonjour
Security	Flash-prevention, dual stream, heartbeat, mirror password protection, privacy mask, watermark IP address filtering, Anonymous access
Standard	ONVIF, PSIA, CGI, ISAPI
Communication Interface	1 RJ45 10M/100M Ethernet interface
Operating Conditions	-30°C ~ +60°C , Humidity 95%
Power Supply	DC12V ± 10%, PoE (802.3af)
Power Consumption	Max. 7.5W
Ingress Protection level	IP 67
IR Range	Up to 50m
Dimensions	299.71 × 86.48 × 85.11(11.8" × 3.4" × 3.35")
Weight	1200g(2.6lbs)