

## PTZ IP CAMERA

### 3MP High Frame Rate Smart PTZ Camera


#### VNC-5380



#### Key Features

- 1/3" HD CMOS sensor
- 3MP (2048\*1536) resolution
- High frame rate, up to 60fps@3MP
- 36X Optical Zoom
- 120dB True WDR
- Smart Tracking , Smart Detection
- Defog
- 200m IR distance & support wiper
- Hi-PoE / 24VAC power supply

#### Dimensions

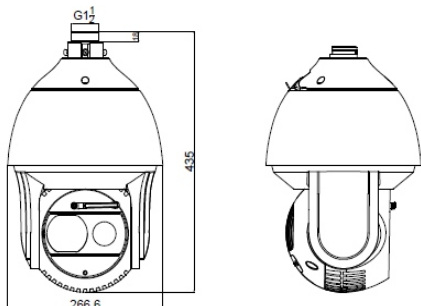

#### Technical Specifications

Model No	VNC-5380
Image Sensor	1/3" Progressive Scan CMOS
Min. Illumination	AGC On:Color:0.05 lux,B/W:0.01 lux ,0 lux with IR
Max. Image Resolution	2048×1536
Features	Privacy Mask, Digital Zoom 16x, HLC, BLC, DWDR 3D DNR, IR Cut Filter, Support Trip-streams, AGC
Smart Features	Smart tracking, Smart detection & ROI encoding
Focal Length	5.7-205mm, 36x
Angle of View	60.6-3.68 degree (Wide-Tele)
Pan and Tilt Range	Pan:360° endless; Tilt: -20°-90°(Auto Flip)
Pan and Tilt Speed	Pan Manual Speed:0.1°-160°/s,preset speed:240°/s Tilt Manual Speed:0.1°-120°/s,preset speed:200°/s
Number of Preset	300
Park Action	Preset / Patrol / Pattern / Auto scan / Tilt scan Random scan / Frame scan / Panorama scan
Patrol	8 patrols, up to 32 presets per patrol
Preset Freezing	Support
Scheduled Task	Preset / Patrol / Pattern / Auto scan / Tilt scan Random scan / Frame scan / Panorama scan Dome reboot/Dome adjust/Aux output
IR Distance	Up to 200m
IR Intensity	Automatically adjust,depending on the zoom ratio
Audio input	1 Mic in/line in interface, line input: 2-24V[p-p]
Audio output	1 Audio output interface,line level,impedance:600Ω
Ethernet	10Base-T / 100Base-TX, RJ45 connector
Monitor Output	1.0V[p-p] / 75Ω, NTSC (or PAL) composite, BNC
Frame Rate	50Hz: 25fps(2048×1536), 25fps(1920×1080),50fps (2048×1536), 50fps(1920×1080), 60Hz: 30fps (2048×1536) /60fps(2048×1536),60fps(1920×1080)
Image Compression	H.264/MJPEG, H.264 encoding
Audio Compression	G.711ulaw/G.711alaw/G.726/MP2L2/G.722
Protocols	IPv4/IPv6, HTTP, HTTPS, 802.1X, QoS, FTP, SMTP UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTP, TCP UDP, IGMP, ICMP, DHCP, PPPoE
Simultaneous Live View	Up to 20 users
Mini SD Memory Card	Up to 128GB Micro SD/SDHC/SDXC card.
User/Host Level	Up to 32 users,3 Levels:administrator,operator&user
Application programming	Open-ended API, support ONVIF, PSIA, CGI
Web Browser	IE 7+, Chrome 18 +, Firefox 5.0 +, Safari 5.02+
Power	High-PoE&24 VAC, Max.60W
Working temperature	-40°C ~ +65°C , Humidity 90% or less
Protection Level	IP66, IK10, TVS 6,000V lightning protection, surge protection and voltage transient protection
Dimensions	Φ266.6(mm)×365.2(mm)
Weight	8kg (approx.)