

4K Laser Smart PTZ Camera

8MP Network Laser IR PTZ Dome Camera


VNC-5880



Key Features

- 1/1.9" HD CMOS sensor
- 4K 8MP(4096x2160)
- 36X Optical Zoom
- 120dB True WDR
- Smart Tracking & Smart Detection
- 500m IR distance & support wiper
- Hi-PoE / 24VAC power supply

Dimensions

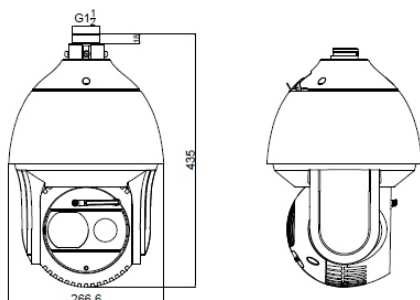

Technical Specifications

Model No	VNC-5880
Image Sensor	1/1.9" Progressive Scan CMOS
Min. Illumination	AGC On:Color:0.02 lux,B/W:0.002 lux,0lux with IR
Max. Image Resolution	4096x2160
Features	Privacy Mask, Digital Zoom 16x, HLC, BLC, WDR, 3D DNR, IR Cut Filter, Support Trip-streams, AGC
Smart Features	Smart tracking, Smart detection & ROI encoding
Focal Length	6.2-202mm, 36x
Angle of View	56.8-2.02degree (Wide-Tele)
Pan and Tilt Range	Pan:360° endless; Tilt: -20°~90°(Auto Flip)
Pan and Tilt Speed	Pan Manual Speed:0.1°~160°/s,preset speed:240°/s Tilt Manual Speed:0.1°~120°/s,preset speed:200°/s
Number of Preset	300
Park Action	Preset / Patrol / Pattern / Auto scan / Tilt scan Random scan / Frame scan / Panorama scan
Patrol	8 patrols, up to 32 presets per patrol
Preset Freezing	Support
Scheduled Task	Preset / Patrol / Pattern / Auto scan / Tilt scan Random scan / Frame scan / Panorama scan Dome reboot/Dome adjust/Aux output
IR Distance	Up to 500m
IR Intensity	Automatically adjust,depending on the zoom ratio
Audio input	1 Mic in/line in interface, line input: 2-24V[p-p]
Audio output	1 Audio output interface,line level,impedance:600Ω
Ethernet	10Base-T / 100Base-TX, RJ45 connector
Monitor Output	1.0V[p-p] / 75Ω, NTSC (or PAL) composite, BNC
Frame Rate	50Hz:25fps(4096×2160, 3840×2160, 3072×1728, 2560×1440, 1920×1080, 1280×720) 60Hz:24fps (4096×2160), 30fps(3840×2160, 3072×1728)
Image Compression	H.264/MJPEG, H.264 encoding
Audio Compression	G.711ulaw/G.711alaw/G.726/MP2L2/G.722/PCM
Protocols	IPv4/IPv6, HTTP, HTTPS, 802.1X, QoS, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTP, TCP, UDP, IGMP, ICMP, DHCP, PPPoE
Simultaneous Live View	Up to 20 users
Mini SD Memory Card	Up to 128GB Micro SD/SDHC/SDXC card.
User/Host Level	Up to 32 users,3 Levels:administrator,operator&user
Application programming	Open-ended API, support ONVIF, PSIA, CGI
Web Browser	IE 7+, Chrome 18 +, Firefox 5.0 +, Safari 5.02+
Power	High-PoE624 VAC, Max.60W
Working temperature	-40°C ~ +65°C , Humidity 90% or less
Protection Level	IP66, IK10, TVS 6,000V lightning protection, surge protection and voltage transient protection
Dimensions	Φ266.6(mm)×435(mm)
Weight	8kg (approx.)