

2 MP & 1.3MP IR Bullet Network Camera


VNC-2220 / VNC-2120



Key Features

- 1/3" progressive scan CMOS
- 1920 x 1080 @ 25fps frame rate
- 4.0mm fixed lens
- H.264 / MJPEG Compression
- Up to 30m IR distance
- Support Line crossing and intrusion detection
- DWDR, 3D DNR, ROI, BLC, Defog
- PoE, ONVIF
- S Sereis : Audio I/O, Alarm I/O (Optional)
- IP66 weatherproof

Dimensions

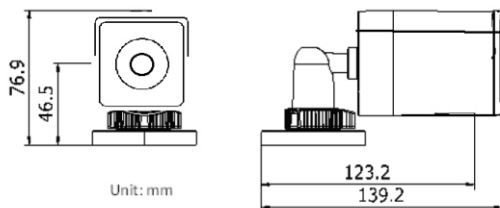

Technical Specifications

Model NO.	VNC-2220		VNC-2120
Image Sensor	1/3" Progressive Scan CMOS		
Min. Illumination	0.07Lux @ (F1.2, AGC ON), 0 Lux with IR		
Shutter Time	1/25 s to 1/100,000 s		
Lens	4mm@ F2.0, Angle of view: 79° (6mm, 12mm optional)		
Lens Mount	M12		
Day & Night	IR cut filter with auto switch		
Digital Noise Reduction	3D DNR		
Wide Dynamic Range	Digital WDR		
Video Compression	H.264 / MJPEG		
H.264 codec profile	Main profile		
Video bit rate	32 Kbps - 16 Mbps		
Dual stream	Yes		
Max. resolution	1920 x 1080		1280 x 960
Frame rate	50Hz: 25fps(1920 x 1080), 25fps (1280 x 960), 25fps (1280 x 720) 60Hz: 30fps(1920 x 1080), 30fps (1280 x 960), 30fps (1280 x 720)		
Image settings	Rotate mode, Saturation, Brightness, Contrast adjustable by client software or web browser		
BLC	Yes, zone configurable		
ROI	Yes, up to 4 configurable areas		
Network storage	NAS		
Alarm trigger	Motion detection, Dynamic analysis, Tampering alarm		
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour		
Security	User Authentication, Watermark		
Standard	ONVIF, PSIA, CGI, ISAPI		
Protection level	IP-66		
Communication interface	1 RJ45 10M / 100M ethernet port		
Reset Button	Yes		
Operating conditions	-30°C - +60°C Humidity 95% or less (non-condensing)		
Power supply	12 V DC ± 10% , PoE (802.3af)		
Power consumption	Max. 7W		
IR Range	30 meters		
Dimensions	60.4x76.9x139.28 mm (2.4" x 3.0" x 5.5")		
Weight	500g (1.1 lbs)		