

## SPECIAL IP CAMERA

### 1.3MP CMOS Double Sensor Network Camera


VNC-6160



### Key Features

- 1/3" progressive scan CMOS
- 1280x960 @ 25fps frame rate
- 2.0mm, 2.8mm, 4mm fixed lens
- Double lenses, double channel video
- Independent lens adjustment
- Stereo Desktop Camera
- PIP (Picture in Picture)
- True WDR, up to 120dB
- Build-in Mic
- H.264 / MJPEG Compression
- 3D DNR, ROI, BLC, Defog
- ONVIF, SD Card
- Audio I/O, Alarm I/O (S Series)

### Dimensions

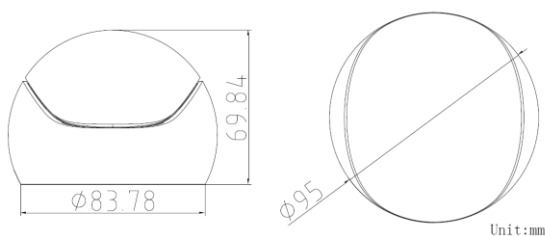

### Technical Specifications

Model No	VNC-6160
Image Sensor	1/3" Progressive Scan CMOS
Min. Illumination	Color: 0.028 Lux @ (F2.0, AGC ON) B/W: 0.0028 Lux @ (F2.0, AGC ON)
Shutter Speed	1/25s ~ 1/100,000s
Slow Shutter	Support
Lens	2.0mm/2.8mm/4mm optional
Wide Dynamic Range	120 dB
Video Compression	H.264 / MJPEG
H.264 Type	Baseline Profile / Main Profile
Video Bit rate	32 Kbps ~ 16 Mbps
Audio Compression	G.711/G.722.1/G.726/MP2L2
Audio Bit Rate	64Kbps(G.711) / 16Kbps(G.722.1) / 16Kbps(G.726) 32-128Kbps(MP2L2)
Max. Resolution	1280 x 960
Frame Rate	50Hz: 25fps(1280 x 960, 1280 x 720) 60Hz: 30fps (1280 x 960, 1280 x 720)
PIP	Support
Image Enhancement	BLC/3D DNR/HLC/ROI/Defog/EIS
Image settings	Rotate Mode, Saturation, Brightness, Contrast, Sharpness adjustable by client software or browser
Day/Night Switch	Auto / Schedule / Alarm trigger
Picture Overlay	LOGO picture can be overlaid on video with 128x128 24bit bmp format
Network storage	NAS (Support NFS,SMB/CIFS)
Alarm trigger	Motion detection, Tampering alarm, Network disconnect, IP address conflict, Storage exception
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS,FTP,DHCP,DNS DDNS, RTP, RTSP, RTCP,PPPoE,NTP, UPnP, SMTP SNMP, IGMP, QoS, IPv6, Bonjour
Security	User Authentication,Watermark,IP address filtering Anonymous access
Standard	ONVIF(PROFILE S,PROFILE G),PSIA,CGI,ISAPI
Audio	1-ch 3.5 mm audio in( Mic in/Line in)/out interface
Communication interface	1 RJ45 10M/100/1000M Ethernet port, 1 RS-485
On-board storage	Built-in Micro SD/SDHC/SDXC slot, up to 128 GB
Operating conditions	-10°C ~ +40°C Humidity 95% or less (non-condensing)
Power supply	12 V DC ± 10%
Power consumption	Max. 5 W
Dimensions	83.78x69.84x95
Weight	940 g