

MOBILE NETWORK VIDEO RECORDER

8 / 4 Channel Mobile NVR


VNR-802P / VNR-402P



Key Features

- Connected to 2MP Resolution Camera
- Pluggable GPS (Global Positioning System)
- 8 / 4 independent PoE network interfaces
- Two pluggable 2.5-inch HDDs/SDDs
- Adopting hard disk vibration damping technology
- Wi-Fi & 3G Dialing function (optional)
- Built-in G-sensor

Rear Panel

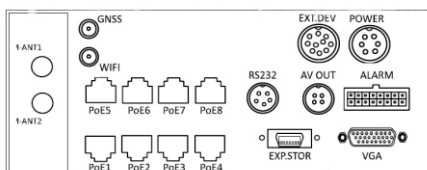

Technical Specifications

Model No	VNR-802P		VNR-402P
IP video input	8-ch		4-ch
Audio input	8-ch		4-ch
VGA output	1-ch, Resolution: 1920 × 1080/60Hz, 1280 × 1024 60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
CVBS output	3-ch, Aviation plug (1.0 Vp-p, 75 Ω) Resolution: PAL: 704 × 576, NTSC: 704 × 480		
Audio output	3-ch, Aviation plug (linear level, 600Ω)		
Video compression	H.264		
Frame rate	25 fps (PAL)/30 (NTSC)		
Audio compression	G.711		
Playback	Local playback: single channel playback; Web playback: single channel playback and multi-channel synchronous playback.		
Hard Disk Type	Two 2.5-inch SATA HDDs/SSDs		
Capacity	Up to 1TB capacity for each disk supported		
Installation	Pluggable		
Protection	Patented 3-generation hard disk box		
Backup	USB interfaces on hard disk box and device front panel supporting data backup		
Dialing	3G (WCDMA) and 4G (LTE-TDD)		
Wi-Fi	802.11 b/g/n supported, 2.4GHz		
Positioning GNSS	GPS		
Two-way audio	1-ch, G. 722		
Sensor-in	4 high/low level signal inputs; 1 pulse signal input		
Alarm input	3 high/low level signal inputs		
Alarm output	2 signal outputs		
Network interface	1 RJ45 10M/100M self-adaptive Ethernet interface		
Serial interface	1 RS-232 interface. / 1 RS-422 interface, including reserved auto announcer interface.		
USB interface	1 USB2.0 interface on the front panel;		
PoE interface	VNR-802P : 8 / VNR-402P : 4 RJ45 10M/100M self-adaptive PoE interfaces, 802.3af,		
eSATA interface	1		
EXP.STOR	Connectable to external HDD for storage expansion		
SIM card	1, standard SIM card slot		
Operating system	Embedded Linux operation system		
Operating method	Local operation, IR remote control, Web operation		
Power supply	9 to 32 VDC		
Consumption	Standby: Max. 0.5W; Full load: Max.20W		
Working temperature	-10°C ~ +55°C with enterprise-class HDD; -20°C ~ +60°C with industrial-class HDD.		
Working humidity	10% to 90%		
Dimensions	245.8mm×202mm×86.87mm)		
Weight	≤ 3.5kg (7.72 lb) (without hard disk)		