

EXIR HD-TVI CAMERA

3MP Motorized VF EXIR Bullet Camera


VHC-6330



Key Features

- 3 Megapixel high-performance CMOS
- Analog HD output, up to 3MP resolution
- 2.8-12mm motorized vari-focal lens
- True WDR, up to 120dB
- EXIR technology, up to 40m IR distance
- True Day/Night
- OSD menu, DNR, SMART IR
- UTC (Up the Coax) function
- IP66 weatherproof

Dimensions

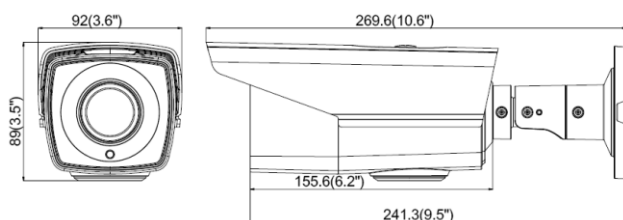

Technical Specifications

Model No	VHC-6330
Image Sensor	3MP CMOS Image Sensor
Signal System	PAL / NTSC
Effective Pixels	2052(H)*1536 (V)
Min. Illumination	0.01 Lux @ (F1.2,AGC ON), 0 Lux with IR
Shutter speed	1/25s to 1/50,000s
Lens	Motorized VF lens; 2.8 - 12 mm @ F1.2
Lens Mount	φ14
Angle Adjustment	Pan:0°-360°;Tilt:0°-90°;Rotate:0°-360°
Day & Night	ICR
Synchronization	Internal synchronization
WDR	120dB
Video Frame Rate	1920 x 1536 @18fps , 1920 x 1080 @25fps
HD Video Output	1 Analog HD output
S / N Ratio	>62dB
AGC	Support
D/N Mode	Color/BW/SMART
White Balance	ATW/MWB
BLC	Support
SMART IR	Support
Digital Noise Reduction	Support
Mirror	Support
Language	English
Working Temperature	-40°C ~ +60°C
Humidity	Humidity 90% or less (non-condensing)
Power Supply	12 VDC±15%; -A: 12 VDC/24 VAC±15%
Power Consumption	Max. 6W
Weather Proof Ratings	IP 66
IR Range	Up to 40m
Communication	Up the coax
Dimensions	92mm×84.8mm×269.6mm (3.62"×3.34"×3.34")
Weight	Approx. 900g (1.98lb)