

## HD-TVI CAMERA

### 2MP IR Turret Camera


#### VHC-3240



#### Key Features

- 2 Megapixel high-performance CMOS
- Analog HD output, up to 2MP resolution
- 2.8mm, 3.6mm, 6mm fixed lens
- Up to 20m IR distance
- True Day/Night
- OSD menu, 3D DNR, Smart IR
- UTC (Up the Coax) function
- IP66 weatherproof

#### Dimensions

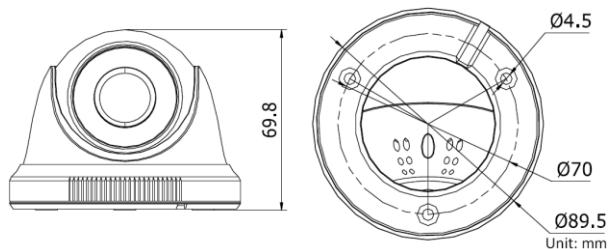

#### Technical Specifications

Model No	VHC-3240
Image Sensor	2 MP CMOS Image Sensor
Signal System	PAL / NTSC
Effective Pixels	1930(H)*1088(V)
Min. Illumination	0.01 Lux @(F1.2,AGC ON), 0 Lux with IR
Shutter speed	1 / 25(1 / 30) s to 1 / 50,000 s
Lens	2.8mm, 3.6mm, 6mm optional Angle of View: 105.8°(2.8mm), 84.3°(3.6mm) 55.4°(6mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 75°, Rotation: 0 - 360°
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	1080p@25fps/1080p@30fps
HD Video Output	1 Analog HD output
S / N Ratio	More than 52dB
AGC	Support
D/N Mode	Color/BW/EXT
White Balance	Auto/ Manual
BLC	Support
Language	English
Digital Noise Reduction	Support
Mirror	Support
Working Temperature	-40°C - +60°C
Humidity	Humidity 90%
Power Supply	12 VDC
Power Consumption	Max. 3W
Weather Proof Ratings	IP 66
IR Range	Up to 20m
Communication	Up the coax
Dimensions	Φ89.5 × 69.8 mm(Φ3.52" × 2.75")
Weight	280g